

# REFRIGERATION 2015 · 16



**FAGOR** 

*Reach Ins | Undercounters | Work Tops | Prep Tables | Pizza Tables | Merchandisers | Bar | Display Cases*



## Fagor Industrial

Is a worldwide leading company in the food service equipment industry. We provide hotels, restaurants and institutions with professional refrigeration, dishwashing, combi ovens, blast chillers, laundry and cooking equipment.

Our wide range of products respond to the most demanding professional needs in more than 90 countries. The success of our products relies on Fagors' human talent that stands behind every product we produce.

The convergence of customer satisfaction, employee satisfaction and respect for the environment is the spirit propelling all our actions.

## Together

At Fagor Industrial we believe that joint effort leads to the best solutions. We are focused on giving the best of ourselves to achieve success, together. Together, always within your reach, to listen and work proactively. Working as a team, with a spirit that is the essence of the company and reaches employees, clients, distributors, and professionals.

## we

Fagor Industrial is the sum of the people who make the company successful. We are the ones that make Fagor a prestigious company around the world. People who strive to improve day by day, who want to cross the limits. Talented and dedicated people who are firmly focused on going one step ahead.

## evolve

In our world today, we are required to evolve and innovated, while searching for the best and most efficient solution. We strive for the best, for excellence, while creating value. At Fagor Industrial, this spirit of evolution has allowed us to be what we are today. We are convinced that this is the road to achievement, to continue learning and be motivated to grow and help others grow.





## EVOLUTION

*From 1960 until today: "A history marked by belief in talent and perseverance"*

Fagor Industrial was established in 1960, selling industrial enamelled cook tops for the hotel and restaurant industry. Soon, the company began manufacturing its own products, expanding its product range to include professional dishwashing and laundry equipment.

For years, Fagor Industrial has continued to expand its array of products and services, developing industrial refrigeration equipment, ranges, ovens, buffets and perfecting its scope of laundry and dishwashing products.

After the Lucena plant in Spain was inaugurated, Fagor has strengthened its focus on refrigeration equipment. New plants have opened in Poland, Turkey and Mexico, all committed to this product range.

Fagor industrial is part of Mondragón (MCC), the seventh largest corporate group in Spain. Encompassing more than 260 companies and organization divided in three areas: Financial, Industrial, and Distribution. Currently, MCC employs more than 93,000 people and has more than 70 companies outside of Spain.

## QUALITY

*Our commitment to quality is at the top of our priority list.*

Fagor Industrial was a pioneer in Spain, certifying its quality management system in 1991 and renovating every 3 years.

Our Management system was designed in keeping with the European Foundation for Quality Management and acknowledged in 2004 with the "Golden Q" award. The management systems are implemented in keeping with the international prestigious norms (ISO 9001, ISO 14001, OSHAS 18001) and all systems are certified.

EXCELLENCE =  
EXPERIENCE +  
TALENT



Commitment to detail, impeccable customer service, awareness of the professionals' needs.

Projecting excellence and improving products through internationalization, training, research, innovation and continuous development.



Refrigeration



Ware  
Washing

Customized  
Design





WORLD  
WIDE  
SOLUTIONS



Combi Ovens



Refrigeration




Cooking Systems



Blast Chillers



*Knowledge crosses borders and fosters understanding,  
promoting the creation of new horizons.*

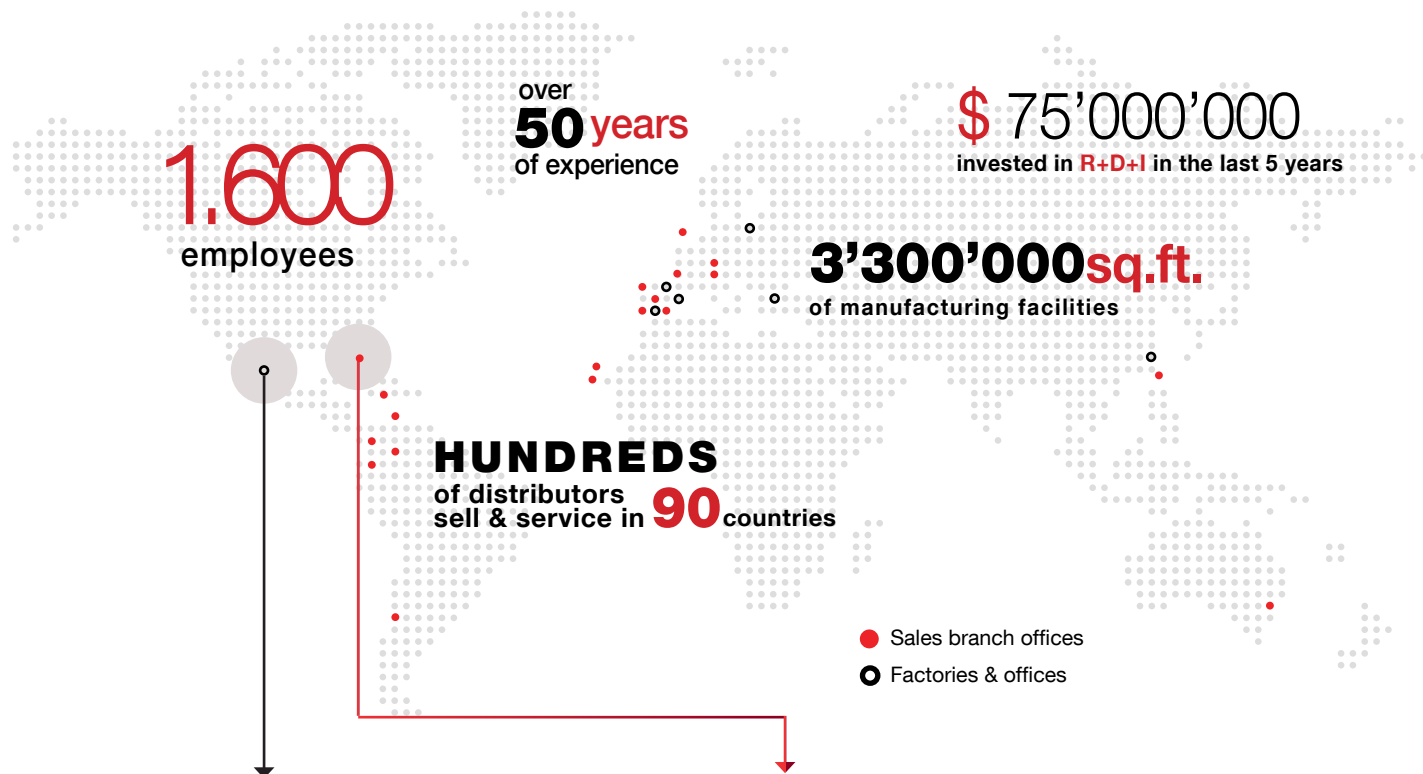

## MEXICO FACTORY

Located in San Luis de Potosi, same day transit to the US/Mexican border. ISO 9001 certified to serve the America's with North American product specifications.

Adhering to the North American Free Trade Agreement (NAFTA), Mexico is a logical choice for Fagor's 6th refrigeration facility worldwide. We have just expanded our facilities to more than double the plant size with yearly product development.

In-house R&D department with laboratory, pre-approved for self-testing. The product is double tested and inspected prior to shipment by qualified technicians. Factory is also NSF approved for custom stainless steel fabrication.

## U.S. HEADQUARTER

Located in Miami, our 30,000 sq.ft. headquarter centralizes all services, with specialized departments all working closely to provide comprehensive and personalized solutions to each customer.

Marketing, Sales, Operations, Accounting, Service and Technical Support are always available to guide and assist you before and after sales, serving you through-out your product's life.

A new showroom and a demo-kitchen area will be inaugurated this year to host training sessions and seminars for our sales network as part of our constant investment in talent.

## NETWORK

Sales representatives and distributors coast to coast helping build a strong and structured dealer network. Multilingual professionals available to better serve our diverse market. Strategically located distribution centers for availability, agility and convenience. All with the goal to get our product delivered in a timely manner.

Nationwide authorized and specialized service agents including parts distribution facilities for prompt support and service.

United States, Canadian and Caribbean offices for additional sales and support.



# REACH-INS


## Refrigerators & Freezers

Fagor Reach-in line comes in multiple standard sizes and various options, to fit every space in your restaurant, bar or professional kitchen.

Our solid built units incorporate the latest Industry technology and provide you with stable refrigerated storage for years to come.



*Strength to get the job done!*

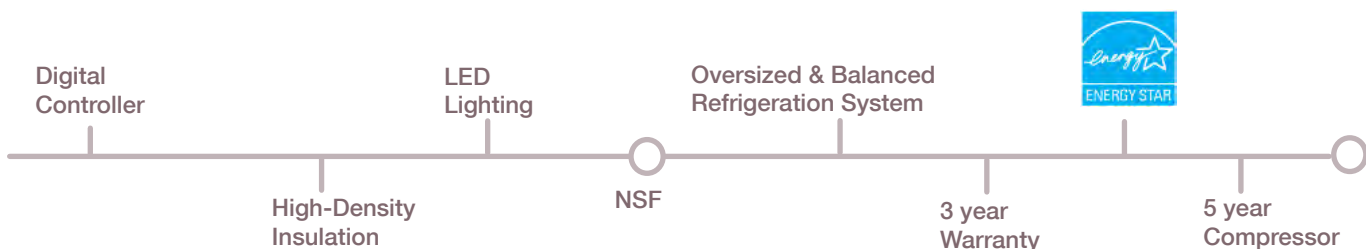



## Smart, Hygienic & Efficient

### Step into the future with a smart and highly efficient compact refrigeration system

Intelligent control ensure maximum performance, extended product life and energy savings. Solid construction with high quality stainless steel and ergonomic design.

Smart compact design locates evaporator outside the food zone for maximized interior capacity and hygiene. Embossed integrated interior guides optimize storage space and provide effective and easy cleaning.




#### Intelligent electronic controller for efficiency

- **ECO function** saves energy thru automatic temperature adjustment. Ideal for off-peak periods: night, vacations...
- **Pull Down System** to reach operation temperature in a timely and efficient manner.
- **Extended unit life** thanks to:
  - **Self-diagnosis** technology that prevents malfunctions.
  - Condenser **maintenance system detection**.
- Control panel with **IPX5 water-proof protection**.
- Optional **HACCP system**.



#### Hygiene

- Top mounted evaporator outside the food zone to guarantee sanitation.
- Stainless steel embossed rack support system for ease of cleaning.



#### HQ Stainless Steel

High quality 304 stainless steel interior and exterior with integrated and ergonomic full length door handles.



#### Compact design, same capacity, outstanding performance.

- 24 levels of storage capacity with stamped guides as part of the wall increasing usable interior space.
- Top mounted refrigeration system out of the food zone provides more space inside the chamber.
- Air distribution channel for uniform temperature throughout the cabinet.





# Q Series Reach In's



## Specifications



**Intelligent digital controller**/display with **self-diagnosis** system. **ECO** function during off peak hours and **pull down** system.



**High quality 304 stainless steel construction** with covered corner interior floor. Accepts full size **18" x 26 bun pans**.



Stainless steel door with **full length recessed door handles**, **instep design** for added protection of doors gaskets.



**LED interior light**, **locks** and **castors** standard.



2-3/8" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency**.



Refrigerators maintain product temperature from 33° to 38°F, Freezers from -8° to 0°F. **Automatic defrost**.



Balanced, **energy efficient** refrigeration system. Environmentally friendly R-134A Refrigerators & R-404A Freezers.



**Air distribution channel** for uniform temperature throughout the cabinet.



Top mount refrigeration system located outside the chamber for hygiene and increased capacity. Easy front service access.



Self-closing door with **90° stay open feature** for convenient loading and unloading of products.



Magnetic door gaskets, easily removed without tools for cleaning and replacement.




Glass door units utilize **dual pane** glass with aluminum frames.



QR(F)-1



QR-1G

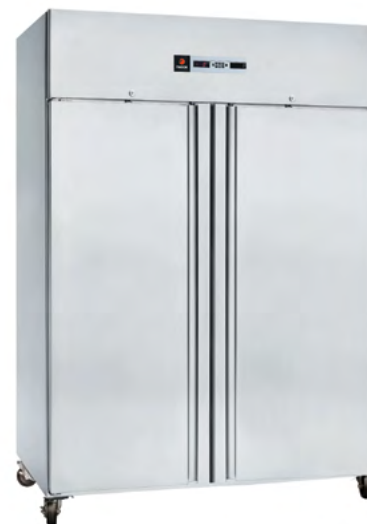

QR(F)-2



Conforms to UL and NSF-7 Standards

### ► New Dual Temp unit coming in 2015

Model	Doors	Shelves	HP	Volts	Amps	Capacity (Cu. Ft.)	Crated Weight (lbs)	Cabinet Dimensions		
								L	D	H*
Refrigerators										
QR-1	1	3	1/4	115	3.7	23	290	25-3/4"	31-1/2"	73-3/4"
QR-2	2	6	1/3	115	5.6	49	395	51-7/8"	31-1/2"	73-3/4"
QDT-2 ► 2015	2	6	1/4 - 1/3	2 x 115	3.7 - 8.2	2 x 23	380	51-7/8"	31-1/2"	73-3/4"
Refrigerators w/ Glass Door(s)										
QR-1G	1	3	1/4	115	3.7	23	300	25-3/4"	31-1/2"	73-3/4"
QR-2G	2	6	1/3	115	5.6	49	415	51-7/8"	31-1/2"	73-3/4"
Freezers										
QF-1	1	3	3/4	115	8.2	23	290	25-3/4"	31-1/2"	73-3/4"
QF-2	2	6	1	115	12.1	49	395	51-7/8"	31-1/2"	73-3/4"

\*Height does not include 4" castors (5 3/4" overall) or 6" for legs.

\*\* All specifications are subject to change without notice

FACTORY ONLY OPTIONS : Solid half doors and HACCP

# QV Series Reach In's



## Specifications



Digital controller/display for a more precise temperature.



**All stainless steel interior and exterior** construction with coved corner interior floor. Accepts full size **18" x 26 bun pans**.



Stainless steel door with **full length recessed door handles, instep design** for added protection of doors gaskets.



Hot gas condensate system for increased efficiency while preventing water overflow in pan.



2-3/8" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency**.



Refrigerators maintain product temperature from 33° to 38°F, Freezers from -8° to 0°F. **Automatic defrost.**



Balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators & R-404A Freezers.



Recessed evaporator for greater interior capacity and airflow to better maintain your products at optimal temperature.



Bottom mount refrigeration system with a service friendly rail system for ease of serviceability.



Self-closing door with **90° stay open feature** for convenient loading and unloading of products.



Magnetic door gaskets, easily removed without tools for cleaning and replacement.



Glass door units utilize **dual pane** glass with aluminum frames. **LED interior light** for greater visibility.



QVR(F)-1



QVR-2G



QVR(F)-3

► Coming soon



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	HP	Volts	Amps	Capacity (Cu. Ft.)	Crated Weight (lbs)	Cabinet Dimensions		
								L	D	H*
Refrigerators										
<b>QVR-1</b>	1	3	1/4	115	5.6	24.5	295	27-3/4"	31"	79-3/8"
<b>QVR-2</b>	2	6	1/3	115	6.9	52	460	55-1/4"	31"	79-3/8"
<b>QVR-3</b> ►	3	9	3/4	115	12.5	76	665	83-1/4"	31"	79-3/8"
Refrigerators w/ Glass Door(s)										
<b>QVR-1G</b>	1	3	1/4	115	6.0	24.5	315	27-3/4"	31"	79-3/8"
<b>QVR-2G</b>	2	6	1/3	115	7.3	52	495	55-1/4"	31"	79-3/8"
<b>QVR-3G</b> ►	3	9	3/4	115	12.7	76	705	83-1/4"	31"	79-3/8"
Freezers										
<b>QVF-1</b>	1	3	3/4	115	8.5	24.5	305	27-3/4"	31"	79-3/8"
<b>QVF-2</b>	2	6	1	115	12.9	52	475	55-1/4"	31"	79-3/8"
<b>QVF-3</b> ►	3	9				76	685	83-1/4"	31"	79-3/8"

\*Height does not include 4" castors (5" overall) or 6" for legs.  
\*\* All specifications are subject to change without notice



# TABLES

## Refrigerators & Freezers

Fagor prep tables set up a sturdy, comfortable and clean workspace while featuring an efficient and reliable refrigeration system.

All stainless steel interior and exterior, with high density insulation, self closing doors and 120° stay open feature for the best convenience.



*When working becomes easier...  
Where performance meets comfort.*

# Undercounters



## Specifications



**All stainless steel interior and exterior** construction with coved corner interior floor to meet NSF requirements.



Stainless steel door with **full length recessed door handles, instep design** for added protection of doors gaskets.



Factory balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.



Refrigerators maintain product temperature from 33° to 38°F, Freezers from -8° to 0°F. **Automatic defrost.**



Hot gas condensate system for increased efficiency while preventing water overflow in pan.



**Front and bottom breathing** refrigeration system for built-in applications.



Analog controller on refrigerators/ digital control on freezers to better handle extreme environments.



Two adjustable heavy duty epoxy coated wire shelves with clips per door.



36" working height. Optional: 2.5" castors for 34" high undercounter applications.



2" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**



Self-closing door with **120° stay open feature** for convenient loading and unloading of products.



Magnetic door gaskets, easily removed without tools for cleaning and replacement.



FUR(F)-27



FUR(F)-60  
Optional RBS-60 removable backsplash



FUR-72



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	HP	Volts	Amps	Capacity (Cu.Ft.)	Crated Weight (lbs)	Cabinet Dimensions L D H*		
Refrigerators										
FUR-27	1	2	1/6	115	2.7	6.1	182	27"	30"	31"
FUR-48	2	4	1/4	115	5.4	11.8	260	48"	30"	31"
FUR-60	2	4	1/3	115	6.7	15.0	305	60"	30"	31"
FUR-72	3	6	1/3	115	6.7	18.2	365	72"	30"	31"
Freezers										
FUF-27	1	2	3/4	115	8.2	6.1	183	27"	30"	31"
FUF-48	2	4	3/4	115	8.5	11.8	265	48"	30"	31"
FUF-60	2	4	3/4	115	8.5	15.0	310	60"	30"	31"

\*Height does not include 4" castors (5" overall) or 6" for legs.

\*\* All specifications are subject to change without notice.



# Worktops



## Specifications



**All stainless steel interior and exterior** construction with coved corner interior floor to meet NSF requirements.



Stainless steel door with **full length recessed door handles, instep design** for added protection of doors gaskets.



Factory balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.



Refrigerators maintain product temperature from 33° to 38°F, Freezers from -8° to 0°F. **Automatic defrost.**



Hot gas condensate system for increased efficiency while preventing water overflow in pan.



**Front and bottom breathing** refrigeration system for built-in applications.



Analog controller on refrigerators/ digital control on freezers to better handle extreme environments.



Two adjustable heavy duty epoxy coated wire shelves with clips per door.



36" working height with **fixed 4" backsplash** and castors standard..



2" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**



Self-closing door with **120° stay open feature** for convenient loading and unloading of products.



Magnetic door gaskets, easily removed without tools for cleaning and replacement.



FWR(F)-27



FWR(F)-60



FWR-72



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	HP	Volts	Amps	Capacity (Cu.Ft)	Crated Weight (lbs)	Cabinet L	Dimensions D	H"
Refrigerators										
FWR-27	1	2	1/6	115	2.7	6.1	190	27"	30"	35"
FWR-48	2	4	1/4	115	5.4	11.8	270	48"	30"	35"
FWR-60	2	4	1/3	115	6.7	15.0	320	60"	30"	35"
FWR-72	3	6	1/3	115	6.7	18.2	385	72"	30"	35"
Freezers										
FWF-27	1	2	3/4	115	8.2	6.1	195	27"	30"	35"
FWF-48	2	4	3/4	115	8.5	11.8	275	48"	30"	35"
FWF-60	2	4	3/4	115	8.5	15.0	325	60"	30"	35"

\*Height does not include 4" castors (5" overall) or 6" for legs.  
\*\* All specifications are subject to change without notice.

# Sandwich/Salad Prep Tables



**FAGOR**

## Specifications



**All stainless steel interior and exterior** construction with coved corner interior floor to meet NSF requirements.



Stainless steel door with **full length recessed door handles, instep design** for added protection of doors gaskets.



Factory balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.



**Forced air design** underneath the pans. Keep products fresher and maintain temperature.



Refrigerators maintain product temperature from 33° to 41°F. **Automatic defrost.**



Hot gas condensate system for increased efficiency while preventing water overflow in pan.



**Front and bottom breathing** refrigeration system for built-in applications.



Standard with full set of **1/6 size pans**, clear poly carbonate, 4" deep. Will accommodate 6" deep pans.



10" x 1/2" full length removable and reversible polyethylene cutting board.



**Insulated hood and lid** helps maintain product temperature while minimizing condensation. Removable for easy cleaning.



2" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**



Self-closing door with **120° stay open feature** for convenient loading and unloading of products.



Magnetic door gaskets, easily removed without tools for cleaning and replacement.



FST-27-8



FST-48-12



FST-72-18



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	Pans	HP	Volts	Amps	Crated Weight (lbs)	Cabinet Dimensions		
								L	D	H*
Refrigerators										
<b>FST-27-8</b>	1	1	8	1/6	115	2.7	205	27"	30"	38"
<b>FST-48-8</b>	2	2	8	1/4	115	5.4	295	48"	30"	38"
<b>FST-48-12</b>	2	2	12	1/4	115	5.4	295	48"	30"	38"
<b>FST-60-8</b>	2	2	8	1/3	115	6.7	342	60"	30"	38"
<b>FST-60-16</b>	2	2	16	1/3	115	6.7	342	60"	30"	38"
<b>FST-72-12</b>	3	3	12	1/3	115	6.7	405	72"	30"	38"
<b>FST-72-18</b>	3	3	18	1/3	115	6.7	405	72"	30"	38"

\* Height does not include 4" castors (5" overall) or 6" for legs  
 \*\* All specifications are subject to change without notice



# Mega Top Prep Tables



## Specifications



**All stainless steel interior and exterior** construction with coved corner interior floor to meet NSF requirements.



Stainless steel door with **full length recessed door handles, instep design** for added protection of doors gaskets.



Factory balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.



**Forced air design** underneath the pans. Keep products fresher and maintain temperature.



Refrigerators maintain product temperature from 33° to 41°F. **Automatic defrost.**



Hot gas condensate system for increased efficiency while preventing water overflow in pan.



**Front and bottom breathing** refrigeration system for built-in applications.



Standard with full set of **1/6 size pans**, clear poly carbonate, 4" deep. Will accommodate 6" deep pans.



10" x 1/2" full length removable and reversible polyethylene cutting board.



**Insulated hood and lid** helps maintain product temperature while minimizing condensation. Removable for easy cleaning.



2" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**



Self-closing door with **120° stay open feature** for convenient loading and unloading of products.



Magnetic door gaskets, easily removed without tools for cleaning and replacement.



FMT-27-12



FMT-48-18



FMT-72-30



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	Pans	HP	Volts	Amps	Crated Weight (lbs)	Cabinet Dimensions		
								L	D	H*
Refrigerators										
FMT-27-12	1	1	12	1/6	115	2.7	225	27"	36-1/2"	42"
FMT-48-18	2	2	18	1/4	115	5.4	327	48"	36-1/2"	42"
FMT-60-24	2	2	24	1/3	115	6.7	360	60"	36-1/2"	42"
FMT-72-30	3	3	30	1/3	115	6.7	465	72"	36-1/2"	42"

\*Height does not include 4" castors (5" overall) or 6" for legs.  
\*\* All specifications are subject to change without notice

# Pizza Prep Table



Specifications

FAGOR

- All stainless steel interior and exterior** construction with coved corner interior floor to meet NSF requirements.
- Stainless steel door with **full length recessed door handles, instep design** for added protection of doors gaskets.
- Factory balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.
- Forced air design** underneath the pans. Keep products fresher and maintain temperature.
- Refrigerators maintain product temperature from 33° to 41°F. **Automatic defrost.**
- Hot gas condensate system for increased efficiency while preventing water overflow in pan.
- Front and side breathing** refrigeration system for built-in applications.
- Standard with full set of **1/3rd size pans**, clear poly carbonate, 4" deep. Will accommodate 6" deep pans.
- 19" full length removable and reversible polyethylene cutting board.
- Insulated hood and lid** helps maintain product temperature while minimizing condensation. Removable for easy cleaning.
- Standard (2) epoxy shelves per door and rail system which can hold 12" x 20" foodservice pans. (pans sold separately). Optional universal pan rails for 18" x 26" bun pans.
- 2" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**
- Self-closing door with **120° stay open feature** for convenient loading and unloading of products.
- Magnetic door gaskets, easily removed without tools for cleaning and replacement.



FPT-46



FPT-67

Coming soon



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	Top Pans	HP	Volts	Amps	Capacity (Cu. Ft.)	Crated Weight (lbs)	Cabinet Dimensions		
									L	D	H*
Pizza Tables											
FPT-46	1	2	6	1/4	115	5.4	15.4	328	46"	32-1/8"	36-3/4"
FPT-67	2	4	9	1/3	115	6.5	26	450	67-1/4"	32-1/8"	36-3/4"
FPT-93	3	6	12	1/2	115	9.1	35	570	93-3/4"	32-1/8"	36-3/4"

\*Height does not include 5" castors (6" overall) or 6" for legs.  
 \*\* All specifications are subject to change without notice

# Deep Undercounter / Worktop



Specifications

FAGOR



**All stainless steel interior and exterior** construction with coved corner interior floor to meet NSF requirements.



Stainless steel door with **full length recessed door handles, instep design** for added protection of doors gaskets.



Factory balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.



Refrigerators maintain product temperature from 33° to 38°F. **Automatic defrost.**



Hot gas condensate system for increased efficiency while preventing water overflow in pan.



**Front and side breathing** refrigeration system for built-in applications.



“SUR” model. 36” working height. Optional: 2.5” castors for 34” high undercounter applications.



“SWR”model. 36” working height with **fixed 4” backsplash** and castors standard.



Standard (2) epoxy shelves per door and rail system which can hold 12” x 20” foodservice pans. (pans sold separately). Optional universal pan rails for 18” x 26” bun pans.



2” CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**



Self-closing door with **120° stay open feature** for convenient loading and unloading of products.



Magnetic door gaskets, easily removed without tools for cleaning and replacement.



SUR-46





SWR-67

Coming soon



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	HP	Volts	Amps	Capacity (Cu. Ft.)	Crated Weight (lbs)	Cabinet Dimensions		
	L	D	H*							
Deep Undercounter Refrigerators										
<b>SUR-46</b>	1	2	1/4	115	5.4	14.6	280	46"	32-1/4"	31"
<b>SUR-67</b>	2	4	1/3	115	6.5	18.7	345	67-1/4"	32-1/4"	31"
<b>SUR-93</b> 	3	6	1/2	115	9.1	24	490	93- 3/4"	32-1/4"	31"
Deep Worktop Refrigerators										
<b>SWR-46</b>	1	2	1/4	115	5.4	14.6	290	46"	32-1/4"	34"
<b>SWR-67</b>	2	4	1/3	115	6.5	18.7	360	67-1/4"	32-1/4"	34"
<b>SWR-93</b> 	3	6	1/2	115	9.1	24	510	93- 3/4"	32-1/4"	34"

\*Height does not include 5” castors (6” overall) or 6” for legs.  
\*\* All specifications are subject to change without notice



*Make products look as cool  
as they are*



## MERCHANDISERS

### Refrigerators & Freezers

Fagor merchandisers feature dual and triple pane glass door, contributing to energy efficiency and savings.

Standard digital control displays precise temperature for customer convenience while LED lights showcase the best out of your products.



# Merchandisers Swing Door



## Specifications



**Intelligent digital controller** with **ECO** function during off peak hours for 15% energy savings. **Door alarm**.



**Large digital display** for easier and more attractive temperature visibility.



Balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators & R-404A Freezers.



Hot gas condensate system for increased efficiency while preventing water overflow in pan.



Refrigerators maintain product temperature from 33° to 40°F, Freezers from -8° to 0°F. **Automatic defrost**.



Black vinyl coat steel exterior, white aluminum interior with stainless steel floor. Available in painted white exterior.



**Interior LED lighting** for low energy consumption & greater visibility.



Swing door with On & Off Rocker switch, reduces the amount of moisture and favours temperature preservation.



From 2" to 2-3/8" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency**.



Bottom mount refrigeration system with a service friendly rail system for ease of serviceability.



Heavy duty adjustable epoxy coated wire shelves (4 per door standard).



**Thermal insulated doors**, with double pane glass & aluminum frames. **Illuminated sign panel** for greater visibility.



FM-10-SL54



FM-16(F)



FMD-23(F)



FMD-49



Conforms to UL and NSF-7 Standards

▶ **Coming soon**


Model	Doors	Capacity (Cu. Ft.)	Shelves	HP	Volts	Nema Plug	Amps	Crated Weight (lbs)	Cabinet Dimensions		
									L	D	H
Refrigerators											
<b>FM-10-SL54</b>	2	10	4	1/4	115	5-15P	5.1	210	36	21-3/4"	54"
<b>FM-16</b>	1	16	4	1/4	115	5-15P	5.8	240	27"	28"	72-5/8"
<b>FMD-23</b>	1	23	4	1/4	115	5-15P	6.1	300	27"	33-1/2"	78-5/8"
<b>FMD-49</b>	2	49	8	1/3	115	5-15P	6.9	475	54"	33-1/2"	78-5/8"
<b>FMD-72</b> ▶	3	72	12	1/2	115	5-15P	10.3	690	83"	33-1/2"	78-5/8"
Freezers											
<b>FMD-16F</b>	1	16	4	3/4	115	5-15P	8.5	265	27"	28"	72-5/8"
<b>FMD-23F</b>	1	23	4	3/4	115	5-15P	8.8	330	27"	33-1/2"	78-5/8"
<b>FMD-37F</b> ▶	2	37	8	1	115	5-15P	12.0	420	43"	33-1/2"	78-5/8"


\* All specifications are subject to change without notice


# Merchandisers Slide Door





## Specifications


- 


**Intelligent digital controller** with **ECO** function during off peak hours for 15% energy savings. **Door alarm.**
- 


**Large digital display** for easier and more attractive temperature visibility.
- 


Balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators & R-404A Freezers.
- 


Refrigerators maintain product temperature from 33° to 40°F. **Automatic defrost.**
- 


Hot gas condensate system for increased efficiency while preventing water overflow in pan.
- 

Black vinyl coat steel exterior, white aluminum interior with stainless steel floor. Available in painted white exterior.
- 

**Interior LED lighting** for low energy consumption & greater visibility.
- 

Self-closing sliding doors, counter balanced system for a smooth and positive door closing.
- 

From 2" to 2-3/8" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**
- 

Bottom mount refrigeration system with a service friendly rail system for ease of serviceability.
- 

Heavy duty adjustable epoxy coated wire shelves (4 per door standard).



FMD-35-SD




FMD-47-SD



Conforms to UL and NSF-7 Standards

Coming soon

Model	Doors	Capacity (Cu. Ft.)	Shelves	HP	Volts	Nema Plug	Amps	Crated Weight (lbs)	Cabinet Dimensions		
									L	D	H"
Refrigerators											
FMD-35-SD	2	35	8	1/3	115	5-15P	6.9	400	43"	32"	78-5/8"
FMD-47-SD	2	47	8	1/3	115	5-15P	6.9	460	54"	32"	78-5/8"
FMD-69-SD 	3	69	12	1/2	115	5-15P	10.3	670	83"	32"	78-5/8"

\*\* All specifications are subject to change without notice



# BAR LINE

Fagor bar line presents design, performance and efficiency unlike any of its kind.

With lights and locks standard, these robust units offer multiple feature rich configurations: vinyl, stainless steel, glass/solid doors, bottle rails, bin dividers, wine racks...

Details make this line unique.




*Details that make the difference*



## Back Bar

3 levels to fit tall boys.  
Bottle rails standard.  
Self-closing field  
exchangeable solid /  
glass doors.

## Direct Draw



More taps per tower.  
Gas connections standard.  
Exclusive airflow into towers.  
Dunnage shelf provides floor  
protection and airflow  
below kegs.



## Bottle Coolers

Standard locks per lid.  
Interior lights.  
Bottle opener & cap catcher.  
Heavy duty adjustable bin  
dividers.



## Dual Temp

Individually controlled com-  
partments.  
Digital thermostats.  
Variable temperatures:  
Red-white wines/ beer-red  
wines/ beer-white wines.

## Common features

- Evaporator on the side for greater usable interior capacity.
- Self closing doors to ensure maximum efficiency.
- Thicker door with inlay design to protect gaskets.
- 18 gauge stainless steel top for greater durability.
- Slide out compressor rails for serviceability.
- Glass doors are dual pane for thermal efficiency.
- Lights under mullion are protected from workflow.
- Locks and lights for better inventory control.
- Hot gas evaporator in drain pan for efficient condensation.



# Back Bar - Black Finish



## Specifications



Refrigeration system is a free flowing air flow throughout the box to ensure **"Ice Cold"** products at all times.



Stylish wear-resistant black vinyl steel finish front, sides and back. Galvanized interior walls with stainless steel floor.



Balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators & R-404A Freezers.



Refrigerators maintain product temperature from 33° to 38°F. **Automatic defrost.**



Heavy duty 18 gauge stainless steel top.



Left side compressor section on slide rails for ease of service and maintenance. Analog thermostat.



**Field interchangeable** doors from Solid to Glass or Glass to Solid to adapt to your ever changing needs. Locks standard.



**Fixed bottle rails** to enhance the **"merchandising"** and inventory control of your products.



Internal capacity to merchandise **3 "Tall Boy" beers** high for greater flexibility within your back bar.



LED interior lights per door underneath the mullion for added protection and enhance product visibility.



**Self-closing door** with 90° stay open feature for convenient loading and unloading of products.



"G" models have **thermal dual pane glass** doors with black aluminum frame.



FBB-24 single units are rear breathing, standard with 2 epoxy coated flat shelves and comes standard on castors.



FBB-24G



FBB-69



FBB-95G  
Optional BBD black door



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	Kegs	Case Capacities		HP	Amps.	Crated Weight (lbs)	Cabinet Dimensions		
				12 Oz. Can	12 Oz. Bottle				L	D	H
Back Bar											
FBB-24	1	2	1	350	216	1/6	2.5	175	24-1/2"	30-1/2"	40-1/8"
FBB-59	2	4	3	720	486	1/3	6.6	305	59-1/2"	28"	37"
FBB-69	2	4	3	855	594	1/3	6.6	335	69-1/2"	28"	37"
FBB-79	3	6	4	990	702	1/3	6.9	375	80"	28"	37"
FBB-95	3	6	5	1215	864	1/3	7.2	445	95-1/2"	28"	37"
Back Bar w/ Glass Door(s)											
FBB-24G	1	2	1	350	216	1/6	2.5	188	23-3/4"	30-1/2"	40-1/8"
FBB-59G	2	4	3	720	486	1/3	6.6	330	59-1/2"	28"	37"
FBB-69G	2	4	3	855	594	1/3	6.6	360	69-1/2"	28"	37"
FBB-79G	3	6	4	990	702	1/3	6.9	396	80"	28"	37"
FBB-95G	3	6	5	1215	864	1/3	7.2	470	95-1/2"	28"	37"

\*\* All specifications are subject to change without notice

# Back Bar - Stainless Finish



## Specifications



Refrigeration system is a free flowing air flow throughout the box to ensure **"Ice Cold"** products at all times.



Heavy duty stainless steel finish front and sides. Galvanized back and interior walls with stainless steel floor.



Balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators & R-404A Freezers.



Refrigerators maintain product temperature from 33° to 38°F. **Automatic defrost.**



Heavy duty 18 gauge stainless steel top.



Left side compressor section on slide rails for ease of service and maintenance. Analog thermostat.



**Field interchangeable** doors from Solid to Glass or Glass to Solid to adapt to your ever changing needs. Locks standard.



**Fixed bottle rails** to enhance the **"merchandising"** and inventory control of your products.



Internal capacity to merchandise **3 "Tall Boy" beers** high for greater flexibility within your back bar.



LED interior lights per door underneath the mullion for added protection and enhance product visibility.



**Self-closing door** with 90° stay open feature for convenient loading and unloading of products.



"G" models have **thermal dual pane glass** doors with black aluminum frame.



FBB-24 single units are rear breathing, standard with 2 epoxy coated flat shelves and comes standard on castors.



FBB-24GS



FBB-59GS



FBB-95S



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	Kegs	Case Capacities		HP	Amps.	Crated Weight (lbs)	Cabinet Dimensions		
				12 Oz.Can	12 Oz. Bottle				L	D	H
Back Bar - Stainless											
FBB-24S	1	2	1	350	216	1/6	2.5	190	24-1/2"	30-1/2"	40-1/8"
FBB-59S	2	4	3	720	486	1/3	6.6	335	59-1/2"	28"	37"
FBB-69S	2	4	3	855	594	1/3	6.6	375	69-1/2"	28"	37"
FBB-79S	3	6	4	990	702	1/3	6.9	415	80"	28"	37"
FBB-95S	3	6	5	1215	864	1/3	7.2	495	95-1/2"	28"	37"
Back Bar w/ Glass Door(s) - Stainless											
FBB-24GS	1	2	1	350	216	1/6	2.5	200	23-3/4"	30-1/2"	40-1/8"
FBB-59GS	2	4	3	720	486	1/3	6.6	343	59-1/2"	28"	37"
FBB-69GS	2	4	3	855	594	1/3	6.6	390	69-1/2"	28"	37"
FBB-79GS	3	6	4	990	702	1/3	6.9	440	80"	28"	37"
FBB-95GS	3	6	5	1215	864	1/3	7.2	525	95-1/2"	28"	37"

\*\* All specifications are subject to change without notice



# Direct Draw Beer Coolers



## Specifications



Refrigeration system is a free flowing air flow throughout the box to ensure **"Ice Cold"** products at all times.



Stylish wear-resistant black vinyl steel finish front, sides and back. Galvanized interior walls with stainless steel floor.



Maintain temperature from 33° to 38°F. **Automatic defrost.**



Heavy duty stainless steel floor and door frame to protect your investment from normal operations.



Heavy duty 18 gauge stainless steel top.



Left side compressor section on slide rails for ease of service and maintenance. Analog thermostat.



**Field interchangeable** doors from Solid to Glass or Glass to Solid to adapt to your ever changing needs. Locks standard.



Removable **polymer dunnage protective floor**, added protection against abuse and provides air flow underneath the kegs.



3" diameter polished stainless steel draft tower. Standard with **more taps per unit** than competitive brands.



59" & 69" units come with (1) three way **gas valves**, 79" & 95" units comes standard with (1) 4 way gas valve.



LED interior lights per door underneath the mullion for added protection and enhance product visibility.



**Self-closing door** with 90° stay open feature for convenient loading and unloading of products.



"G" models have **thermal dual pane glass** doors with black aluminum frame.



FDD-24(S) single keg units are rear breathing with internal drain, CO2 harness and standard on castors.



FDD-24



FDD-59S



FDD-95  
Optional BBGD glass door/ DSR-95R shelving kit



Conforms to UL and NSF-7 Standards

Model	Doors	Tower	Taps	Kegs	HP	Amps.	Crated Weight (lbs)	Cabinet Dimensions L D H		
Direct Draw Beer Dispensers - Black										
FDD-24	1	1	1	1	1/6	2.5	175	24-1/2"	30-1/2"	40-1/8"
FDD-59	2	2	3	3	1/3	6.6	305	59-1/2"	28"	37"
FDD-69	2	2	3	3	1/3	6.6	335	69-1/2"	28"	37"
FDD-79	3	2	4	4	1/3	6.9	375	80"	28"	37"
FDD-95	3	2	4	5	1/3	7.2	445	95-1/2"	28"	37"
Direct Draw Beer Dispensers - Stainless Steel										
FDD-24S	1	1	1	1	1/6	2.5	180	24-1/2"	30-1/2"	40-1/8"
FDD-59S	2	2	3	3	1/3	6.6	310	59-1/2"	28"	37"
FDD-69S	2	2	3	3	1/3	6.6	345	69-1/2"	28"	37"
FDD-79S	3	2	4	4	1/3	6.9	396	80"	28"	37"
FDD-95S	3	2	4	5	1/3	7.2	455	95-1/2"	28"	37"

\*\* All specifications are subject to change without notice

# Slide Top Coolers



FAGOR

## Specifications



Refrigeration system is a free flowing air flow throughout the box to ensure **"Ice Cold"** products at all times.



Black vinyl steel front, sides and back. "S" models are S/S front and sides with galvanized back. Interior galvanized walls.



Heavy duty 18 gauge stainless steel top and lid over the lip of the top for ease of use and durability.



Maintain temperature from 33° to 38°F. **Automatic defrost.**



Factory balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.



Right side compressor section on slide rails for ease of service and maintenance. Analog thermostat.



**LED interior lights** per unit underneath the top for added protection and enhance product visibility.



After hours protection with our exclusive design **lid locks** to prevent theft during the off hours.



Heavy duty adjustable epoxy coated bin dividers for maximum storage capacity.



Removable sturdy bottle opener and cap catcher.



2" CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**



FBC-50



FBC-65S



FBC-95



Conforms to UL and NSF-7 Standards

Model	Lids	Case Capacities		HP	Amps	Crated Weight (lbs)	Cabinet Dimensions		
		12 Oz.Can	12 Oz. Bottle				L	D	H
Bottle Coolers - Black									
<b>FBC-50</b>	2	36	19	1/4	5.9	245	50-1/2"	26-1/2"	33-3/8"
<b>FBC-65</b>	2	33.5	26	1/3	6.2	280	65-1/2"	26-1/2"	33-3/8"
<b>FBC-79</b>	3	45.5	33.5	1/3	6.5	390	80"	26-1/2"	33-3/8"
<b>FBC-95</b>	3	57	42	1/3	6.8	508	95"	26-1/2"	33-3/8"
Bottle Coolers - Stainless Steel									
<b>FBC-50S</b>	2	26	19	1/4	5.9	260	50-1/2"	26-1/2"	33-3/8"
<b>FBC-65S</b>	2	33.5	26	1/3	6.2	310	65-1/2"	26-1/2"	33-3/8"
<b>FBC-79S</b>	3	45.5	33.5	1/3	6.5	400	80"	26-1/2"	33-3/8"
<b>FBC-95S</b>	3	57	42	1/3	6.8	530	95-1/2"	26-1/2"	33-3/8"

\*\* All specifications are subject to change without notice

# Dual Temp Back Bar



## Specifications



**Individually controlled dual temperature** system for: White Wines / Red Wines, Beer / Whites, Beer / Reds.



Temperatures preset from factory at 42°F and 55°F for left and right compartments respectfully. Field adjustable to customer needs.



Balanced and **energy efficient** refrigeration system, environmentally friendly R-134A Refrigerators.



Stylish wear-resistant black vinyl steel finish front, sides and back. Galvanized interior walls with stainless steel floor.



Heavy duty 18 gauge stainless steel top.



**Field interchangeable** doors from Solid to Glass or Glass to Solid to adapt to your ever changing needs. Locks standard.



**Digital thermostat** per compartment.



LED interior lights per door underneath the mullion for added protection and enhance product visibility.



**Self-closing door** with 90° stay open feature for convenient loading and unloading of products.



"G" models have thermal dual pane glass doors with black aluminum frame.



Warmer compartment is always the opposite side of the compressor housing.



Left side compressor section on slide rails for ease of service and maintenance.



FBB-59G-DT



Conforms to UL and NSF-7 Standards

Model	Doors	Shelves	Capacity per compartment		HP	Amps	Crated Weight (lbs)	Cabinet Dimensions		
			Wine Bottles	Beer Bottles				L	D	H
Dual Temp - Black										
FBB-59-DT	2	4	84	243	1/3	6.9	320	59-1/2"	28"	37"
FBB-59G-DT	2	4	84	243	1/3	6.9	335	59-1/2"	28"	37"
Dual Temp - Stainless Steel										
FBB-59S-DT	2	4	84	243	1/3	6.9	350	59-1/2"	28"	37"
FBB-59GS-DT	2	4	84	243	1/3	6.9	370	59-1/2"	28"	37"

\*\*All specifications are subject to change without notice.



# Sushi & Tapas

Fagor display cases bring the perfect combination of quality materials and modern design. Polished stainless steel, elegant curved glass and anodized aluminium work together under a bright LED blue light for an attractive product display.

These self contained units keep a constant airflow, maintaining all the flavor and texture of your fresh dishes.



*Beautiful presentation,  
perfect temperature, excellent taste*

# Tapas & Sushi Cases



Specifications

FAGOR


- Factory balanced refrigeration system, environmentally friendly R-134A refrigerators.
- Stainless steel construction with durable acrylic side panels.
- Front curved glass display window offers wide viewing area and provides an easy cleaning surface.
- Self-contained system. Compressor mount on right side and drain fitting for easy installation.
- Interior will allow up to 11.5" plate for display.
- Cold plate design** underneath the pans keeps products fresher maintaining optimal temperature at 36°-41° F in food pans.
- Electronic controller for maximum efficiency and temperature precision.
- Interior LED lighting** for low energy consumption, greater visibility and attractive display.
- Rear sliding and removable glass doors for convenient loading and unloading of dishes and easy cleaning.
- Exterior on/off power switch in back of unit.
- Tapas Cases (VTP) come standard with 1/3rd. gastronorm pans, 1.5" deep.
- Sushi Cases (VTP-SL) feature an upper evaporator coil and come standard with ABS plastic ribbed tray.



VTP-139



VTP-175

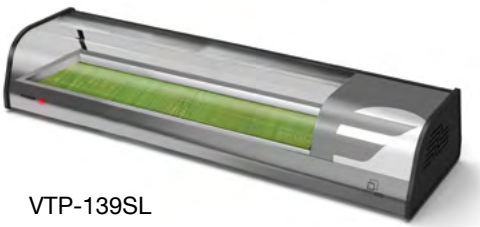

VTP-139SL



VTP-175SL



Conforms to UL and NSF-7 Standards

Model	Pans	Volts	Amps	HP	Crated Weight (lbs)	Cabinet Dimensions		
						L	D	H
Tapas Cases								
VTP-139	6	115	4.2	1/5	110	54-7/8"	16"	9-7/8"
VTP-175	9	115	4.2	1/5	135	68-7/8"	16"	9-7/8"
Sushi Cases								
VTP-139SL	N/A	115	4.2	1/5	115	54-7/8"	16"	9-7/8"
VTP-175SL	N/A	115	4.2	1/5	145	68-7/8"	16"	9-7/8"

\*\* All specifications are subject to change without notice

# Counter Tops

Fagor new countertop prep rails are the perfect solution to upgrade your preparation area or create an attractive self-service station for your take aways.


These refrigerated stainless steel units are designed to maintain a safe food environment and keep your toppings cool and moist. Now it is finally the time to go creative with hotdogs, sandwiches, salads, and much more. Enjoy!



**2.**  
**PUMP**  
**STATION**

**1.**  
**TO GO**  
**STATION**

**3.**  
**FRESH**  
**STATION**

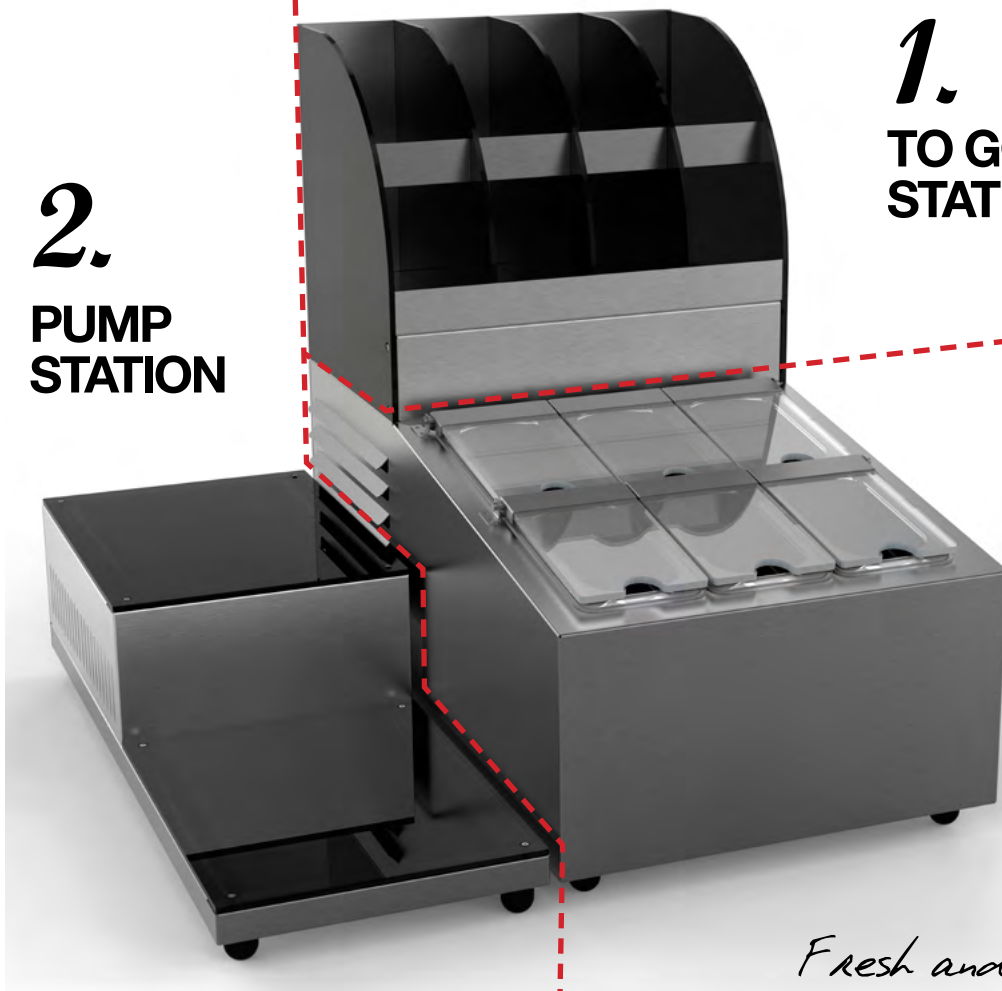


*Fresh and available*





# Refrigerated Countertop Rails





## Specifications


- 


Refrigeration system to keep pans at NSF required temperatures at all times, 33° to 41°F
- 


Factory balanced refrigeration system, environmentally friendly CFC-free, R-134A.
- 

Digital temperature controller with automatic defrost and temperature display to keep food quality for a longer period of time.
- 

**All stainless steel** interior and exterior construction for durability, easy of cleaning and safer environment.
- 

High density CFC-Free polyurethane insulation, foamed in place for **added strength and energy efficiency.**
- 

Units come standard with 4 clear polycarbonate 1/6 size pans - 4" deep. Can accomodate up to 6" deep pans.
- 

Optional: (CPR-4 Only) 4, 5 or 6 Fixed hinged lids system for pans. Kits comes complete with additional pans.
- 

Mounted on 1/2" adjustable legs.



CPR-60-4 (Shown w/ optional lids)




CPR-4



CPR-8

CPR-4 ONLY  
LID SYSTEM  
CLOSE-UPS

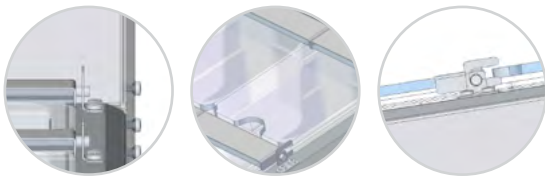

Conforms to UL and NSF-7 Standards

Model	Pans	Volts	Amps	HP	Crated Weight (lbs)	W	Cabinet Dimensions D	H
Counter Top Rails								
CPR-60-4	4	115	2.3	1/4	112	28-1/8"	16"	11"
CPR-8	8	115	3	1/6	168	28-1/8"	26-1/4	11-1/4"
CPR-4	4	115	3	1/6	135	15-3/4"	26-1/4"	11 1/4"
CPR-4 only options	Description							
-4L	Fixed plexiglass hinged lid system for (4) 1/6th size pans. (Pans included with unit)							
-5L	Fixed plexiglass hinged lid system for (2) 1/6th pans / (3) 1/9th pans. (Pans included)							
-6L	Fixed plexiglass hinged lid system for (6) 1/9th pans. (Pans included)							
Togo-8	8 section "To-go" condiment packet station. Stainless steel with black acrylic.							
Base-2	Step up high volume pump station in stainless steel and black acrylic							
** All specifications are subject to change without notice								

\*\* All specifications are subject to change without notice

## Customizable Standards

Fagor goes beyond the standards to offer and guide you thru personalized options to better fit your special needs.

We can customize our products using different materials, accessories and graphics to find the best solution for your business requirements.



*Designing Solutions for every professional need :*



*Tops, sneeze guards, overshelves, preparation islands*



# Accessories

## Castors & Legs

Description	Item
2.5" Stem - Kit Castors - set of 4	CAS-2.5
4" Stem - Kit Castors - set of 4	CAS-4
Low profile castors: Bar 50", 59", 65" & 69"	CAS-3X
Low profile castors: Bar 79" & 95"	CAS-36X
3" Plate Castors w/ support - set of 4 - for 50", 59" & 69"	CAS-3-CH
3" Plate Castors w/ support - set of 6 - for 79" & 95"	CAS-36-CH
Legs - 6" kit - set of 4	LEG-6
Legs - 6" kit - set of 6 - for 79" & 95"	LEG-66

## Shelves: Reach-ins, Tables & Merchandisers

Description	Item
QV Series - Epoxy with clips	ECS-QV
Q Series - Epoxy rack shelf	ECS-Q
Q Series - Center shelf	ECS-QV
FU(W) / FST / FMT Tables - 27" - Epoxy w/ clips	ECS-FT-27
FU(W) / FST / FMT Tables- 48" / 72" - Epoxy w/ clips	ECS-FT-48
FU(W) / FST / FMT Tables - 60" - Epoxy w/ clips	ECS-FT-60
FPT / SU(W) - Epoxy w/ clips	ECS-FS
FM-10 - Epoxy coated w/ clips	ECS-FM-10
FM-16 - Epoxy coated w/ clips	ECS-FM-16
FMD-23/49- Epoxy w/ clips	ECS-FM-23
FMD-35 - Epoxy coated w/ clips	ECS-FM-35
FMD-37 - Epoxy coated w/ clips	ECS-FM-47
FMD-47 - Epoxy coated w/ clips	ECS-FM-47

## Shelves: Back Bar - Clips included

Description	Item
Flat Shelf - 59"	BSF-59
Bottle Rail Shelf - 59"	BSR-59
Flat Shelf - 69"	BSF-69
Bottle Rail Shelf - 69"	BSR-69
Flat Shelf - 79" Left	BSF-79L
Bottle Rail Shelf - 79" Left	BSR-79L
Flat Shelf - 79" Center	BSF-79C
Bottle Rail Shelf - 79" Center	BSR-79C
Flat Shelf - 79" Right	BSF-79R
Bottle Rail Shelf - 79" Right	BSR-79R
Flat Shelf - 95"	BSF-95
Bottle Rail Shelf - 95"	BSR-95
Bottle Rail Shelf - 95" Center	BSR-95C

## Shelving Kit: Direct Draw - Clips included

Description	Item
Flat (F) or Rail (R) - 59"	DD(F/R)-59
Flat (F) or Rail (R) - 69"	DD(F/R)-69
Flat (F) or Rail (R) - Center - 79"	DD(F/R)-79C
Flat (F) or Rail (R) - Right - 79"	DD(F/R)-79R
Flat (F) or Rail (R) - 95"	DD(F/R)-95
Flat (F) or Rail (R) - Center- 95"	DD(F/R)-95C

## Shelves: Back Bar - Dual Temp

Description	Item
Stainless steel wine rack shelves (6 bottles capacity)	DTS-SS
Flat rack shelves	BSF-79 L

## Overshelves: All Tables except Pizza

Description	Single	Double
FU(W)27"	SOS-27	DOS-27
FU(W)/FST/FMT 48"	SOS-48	DOS-48
FU(W)/FMT 60"	SOS-60	DOS-60
FU(W)/FST/FMT 72"	SOS-72	DOS-72

## Slides & Supports

Description	Item
Universal Pan Rails - FPT / SU(W) Series only - Pair	UPR-FS
Shelf Support - FPT / SU(W) Series only - Pair	SSQ-FS

## Bun Tray Racks: QV Reach-ins

Description	Item
Half Door - 5 slots - 4" spacing	BTRHD
Full Door - 11 slots - 4" spacing	BTRFD



3" Stem Castors



Leg



S/S Wine Rack Shelf




Epoxy Coated Shelves



Bottle Rail Shelves



# Accessories



Shelf Support



Half Door Bun Tray Rack

## Removable Back Splash

Description	Item
FUR(F) 27"	RBS-27
FUR(F) 48"	RBS-48
FUR(F) 60"	RBS-60
FUR 72"	RBS-72

## Bar Doors

Description	Item
Black (except 79" unit) - All Doors	BBD
Black - 79" unit - Left Door	BBD-79L
Black Glass (except 79" unit) - All Doors	BBGD
Black Glass - 79" unit - Left Door	BBGD-79L
Stainless Steel (except 79" unit) - All Doors	BSD
Stainless Steel - 79" unit - Left Door	BSD-79L
Stainless Steel Glass (except 79" unit) - All Doors	BSGD
Stainless Steel Glass - 79" unit - Left Door	BSGD-79L



Double Overshelf



Sneeze Guard



Night Cover



Single/Double Tap

## Direct Draw Draft Tower

Description	Item
Single Tap	SDT
Double Tap	DDT

## Modifications for all units

Description	Items
Stainless steel back panel	Consult factory
16 gauge S/S Top	Consult factory

## Slide Top Cooler Dividers

Description	Item
Dividers Left & Right (Except 79" & 95 left)	BCD
Dividers Center	BCD-C
Divider Left Side (79" & 95" units only)	BCD-95L

## Sneeze Guard & Night Cover

Description	Sneeze Guard	Night Cover
FU(W) 27"	SZG-27	NC-27
FU(W)/FST/FMT 48"	SZG-48	NC-48
FU(W)/FMT 60"	SZG-60	NC-60
FU(W)/FST/FMT 72"	SZG-72	NC-72

## Others

Description	Item
Reverse hinging (Factory Only option)	RFH
220 volts / 50 cycles / 1 phase	Export Voltage

## Crumb Catcher for all Tables

Description	Item
FST / FMT 27"	CC-27
FST / FMT 48"	CC-48
FST / FMT 60"	CC-60
FST / FMT 72"	CC-72

# Limited Warranty

AS OF APRIL 1, 2014

REFRIGERATION

**Three Years Parts & Labor Warranty:** Fagor Commercial, Inc. ("Fagor") Warrants to the first-end-user purchaser (the "User") that the Fagor brand equipment sold hereunder, except for parts and accessories which carry the warranty of a supplier (the "Equipment") will be free from defects in material and factory workmanship under normal conditions of use and maintenance and upon proper installation and start-up in accordance with the User manual supplied with each Fagor unit. The obligation of this warranty is covered by Fagor for a period of three (3) years from the date of installation (Warranty commencement date), but in no event to exceed thirty-nine (39) months from the date of shipment from Fagor. Warranty is Not Transferable. Warranty only applies for installations within the continental US and Canada.

**Warranty Coverage:** If there is a defect in material or factory workmanship covered by this Warranty reported to Fagor during the period the applicable Warranty is in force and effect, Fagor will repair or replace, at Fagor's option, that part of the Equipment that has become defective and will cover reasonable labor cost within the corresponding warranty period of time. Fagor shall bear all reasonable labor costs in connection with the installation of these replacement parts, provided that, the installation is conducted by Fagor or its authorized representative. Charges for warranty travel time round trip, total two (2) hours or up to 100 miles total. Any charges exceeding those stated herein must have prior authorization by Fagor. In case Fagor deems the equipment non-repairable, said equipment will be replaced and the replacement unit(s) will carry the same warranty period from the original unit's installation date (original Warranty commencement date).

**Additional Two Year Compressor Part Warranty:** In addition to the warranty set above, Fagor warrants the sealed compressor (part only) for an additional two (2) years based on the original installation date, but not to exceed thirty-nine (39) months after shipment from the manufacturer. This warranty is for defects, both in workmanship and material, under the normal and proper use and maintenance service. The two (2) year extended warranty only applies to sealed parts of the compressor and does not apply to any other part or component, including, but not limited to cabinet, temperature control, refrigerant, motor starting equipment, fan assembly, or any other electrical or mechanical component.

**Exclusions from and Conditions to Warranty Coverage:** This Warranty does not cover parts or accessories, which (a) carry the warranty of a supplier or (b) are abused. Application of this Warranty is further conditioned upon the following:

- **Installation:** The Equipment must be properly installed in accordance with Fagor's installation procedures and by a professional technician.
- **No Alteration:** The Equipment must not have been modified or altered from its condition at the date of original installation.
- **Use:** FAGOR EQUIPMENT IS NOT DESIGNED FOR PERSONAL, FAMILY, OR HOUSEHOLD PURPOSES, AND ITS SALE FOR SUCH PURPOSES IS NOT INTENDED. IN THE EVENT THE EQUIPMENT IS SO USED, THIS WARRANTY SHALL BE NULL AND VOID, AND THE EQUIPMENT IS SO USED, THIS WARRANTY SHALL BE NULL AND VOID, AND THE EQUIPMENT SHALL BE DEEMED TO HAVE BEEN SOLD "AS IS-WHERE IS" WITHOUT ANY WARRANTY OF ANY KIND, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF TITLE, NON-INFRINGEMENT, MERCHANT-ABILITY OR FITNESS FOR A PARTICULAR PURPOSE.
- **Proper Maintenance and Operation:** The Equipment must be properly maintained and operated in accordance with Fagor's maintenance and operating procedures. All service, labor and parts must be acquired from Fagor or its authorized service representative for the User's area.
- This warranty is void if failure is a direct result of handling and/or transportation, fire, water, accident, misuse, acts of god(s), attempted repair by unauthorized persons, improper installation, if serial number has been removed or altered, or if unit is used for purpose other than it was originally intended.

Failure to comply with any of these conditions will void this Warranty. In addition, this Warranty does not cover defects due to apparent abuse, misuse or accident.

**Parts Warranty Coverage:** Fagor warrants all new machine parts produced or authorized by Fagor to be free from defects in material and workmanship for a period of 90 days from the Warranty Commencement Date. If any defect in material and workmanship is found to exist within the warranty period, Fagor will replace the defective part without charge. Defective parts become the

property of Fagor.

Fagor will have no responsibility to honor claims received after the date the applicable Warranty expires. Notwithstanding the foregoing, any claim with reference to the Equipment or any parts therefore for any cause shall be deemed waived unless submitted by the User to Fagor within (30) days after the date the User discovered, or should have discovered, the claim. In connection with all claims under this Warranty, Fagor will have the right, at its own expense, to have its representatives inspect the Equipment at the User's premises and to request all of the User's records pertaining to the Equipment to determine whether a defect exists, whether the conditions set forth in this Warranty have been satisfied, and whether or not the applicable Warranty is in effect.

**THE FOREGOING WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES NOT EXPRESSLY SET FORTH HEREIN, WHETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING BUT NOT LIMITED TO ANY REPRESENTATION OF PERFORMANCE AND ANY IMPLIED WARRANTIES OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. NO OTHER WARRANTIES ARE AUTHORIZED ON BEHALF OF FAGOR UNLESS SPECIFICALLY ISSUED BY FAGOR.**

Fagor shall have no liability for incidental or consequential losses, damages including without limitation or expenses, loss of sales, spoiled food, profits or goodwill, claims whether or not on account of refrigeration failure or punitive or exemplary damages directly or indirectly arising from the sale, handling or use of the Equipment or from any other cause relating thereto, whether arising in contract, tort, warranty, strict liability or otherwise. Fagor's liability hereunder in any case is expressly limited, at Fagor's election, to repair or replacement of Equipment or parts therefore or to the repayment of, or crediting the user with, an amount equal to the purchase price of such goods.

## Terms & Conditions

**Prices & Specifications:** Fagor reserves the right to change the prices and specifications of the equipment and/or material without notice. Prices are FOB Fagor warehouses. All orders are subject to acceptance by Fagor Commercial, Inc.

**Terms:** All orders are subject to credit approval. All Invoices not paid within the specified terms will be subject to a 1.5% per month delinquency charge. Buyer agrees to pay all costs of collection including such attorney's fees as may be allowed by law.

**Taxes:** This price list does not include any Federal, State, City or Local taxes, which may apply and are subject thereto.

**Shipment:** Requested carrier will be used upon request. Fagor has the right to ship via any responsible carrier if requested carrier is unavailable. Shipping charges are payable by consignee and any claims arising as such charges shall be resolved between the carrier and the consignee. Shipping dates are approximates. Fagor is not responsible for any delays in deliveries that are beyond our control.

**Damaged Merchandise:** Inspect shipment for any damage, before accepting it. If damaged, open and inspect the contents with the carrier. Any damage should be noted and reported on the delivering carrier's receipts. Fagor assumes no responsibility for damages while in transit.

**Concealed Damage:** If there is concealed damage to the equipment, notify the carrier immediately. Notification should be made verbally as well as in written form. Request an inspection by the shipping company of the damaged equipment. Retain all crating material until inspection has been made.

**Cancellations & Returns:** Cancelled orders and returned merchandise are subject to a 25% restocking and handling charge. Written authorization is required for a return of any equipment. All equipment returned must be in its original factory crate; freight prepaid and must be in the same condition as originally shipped by Fagor. Returns will only be authorized within 30 days of invoice date.

**Warranty:** Register your product with Fagor Commercial to validate your warranty. Service calls must be made directly through Fagor service department. 1-(866)-463-2467 or e-mail [us.service@onneragroup.com](mailto:us.service@onneragroup.com).



## EUROPE

### SPAIN

Fagor Industrial S.Coop.  
Santxolopetegi Auzoa, 22  
20569 Oñati (Gipuzkoa)

### FRANCE

Fagor Collectivités  
Z.I. De Jalday - CS 60152  
64501 St. Jean de Luz Cedex (France)

### ITALY

Fagor Industriale s.r.l.  
Via Acquedotto Angolo  
Via G. di Vittorio, 111  
21017 Samarate Loc. Verghera (Italia)

### POLAND

Fagor Gastro Polska SP.Z.O.O.  
Palmiry, Warszawska 9  
05-152 Czosnów (Poland)

### CZECH REPUBLIC

Fagor Cgastro CZ s.r.o.  
Trebohostická 9/564  
100 00 Praha 10 (Czech Republic)

### TURKEY

Fagor Endüstriyel Dayanikii Tüketim  
Mamulleri San. Ve Tic.A.S.  
Gebze Güzeller O.S.B İnönü Mah.  
Balçık Yolu Üzeri Gebze. Kocaeli (Turkey)

### PORTUGAL

Nucleo Empresarial Coração da CREL  
Estrada Municipal de Pintéus N.º 15  
2660-194 Sto Antão do Tojal

## AMERICA

### USA

Fagor Commercial, Inc.  
13105 NW 47h Avenue  
Miami, FL. 33054-4525 (USA)

### MEXICO

Fagor Industrial México-Centro América-Caribe  
Carretera Lechería Chamapa KM 2.0  
CPA Logistic Center, Bodega B002  
Col. San Martin Obispo,

### COLOMBIA

Fagor Industrial S.A.  
Calle 80 n°69-70 local 22  
Bogotá (Colombia)

### DOMINICAN REPUBLIC

Fagor Dominicana C. por A.  
Autopista Las Américas, Km 9.5.  
38 Marginal Norte.  
Esq. calle 6, local 201  
Los Frailes 1, Santo Domingo Este.

## ASIA / OCEANIA

### CHINA

Fagor Industrial China  
MCC Industrial Park. Building 2nd Floor.  
West of Huang Pu Jiang Road, Shanghai.  
Kunshan City, Jiangsu Province 215341  
(P.R. China).

### AUSTRALIA

Fagor Australasia Pty. Ltd.  
7 Boola Place (PO Box 466) Dee Why  
New South Wales 2099  
Sidney (Australia)

### UNITED ARABIAN EMIRATES

Fagor Industrial, S. Coop. - Middle East  
U.A.E. Sharjah airport free zone (SAIF Zone)  
Area Q4-42

*Together we evolve*





[www.fagorcommercial.com](http://www.fagorcommercial.com)

FAGOR COMMERCIAL, INC.  
13105 NW 47th Ave, Miami, FL, 33054  
866 GO FAGOR | 305 779 0170  
Fax. 305 779 0173  
[info@fagorcommercial.com](mailto:info@fagorcommercial.com)

